



# DIN 7504 P Z - sim. ISO 15482

## Self drilling screws type P

countersunk head with cross recess Z (Pozidrive)

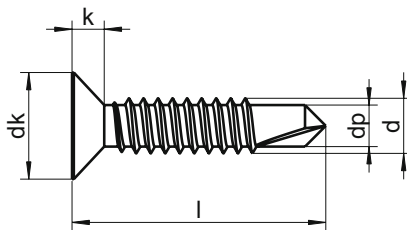

dp	3,1	3,6	4,1
dk max.	7,5	8,1	9,5
k max.	2,3	2,5	3,0
⊕	Z 2	Z 2	Z 2
<b>Length / Ø</b>	<b>ST3,9</b>	<b>ST4,2</b>	<b>ST4,8</b>
13 (1/2")	▲	▲	▲
16 (5/8")	▲	▲	▲
19 (3/4")	▲	▲	▲
22 (7/8")	▲	▲	▲
25 (1")	▲	▲	▲
32 (1 1/4")	▲	▲	▲
38 (1 1/2")	▲	▲	▲
45 (1 3/4")	▲	▲	▲
50 (2")	▲	▲	▲
<b>SU</b>	1000 ≥ 32 500	1000 ≥ 32 500	500

■ A1 / ▲ A2 / ● A4 | SU: Sales units | All measurements in mm / inch | Other measurements on request.

Example item no. 7504-2-3,9X38PZ DIN 7504 - A2 - Ø 3,9mm - l = 38mm - form P - pozidrive

Please note that self drilling screws, made of stainless steel are mainly suitable for the processing in aluminium and thin stainless steel sheets. Self drilling screws with countersunk head in other dimensions and A4 are available on request. Self drilling screws with countersunk head and TX can be found as WS 9167 in this catalogue.